



4-102/4-103

Vibration Transducer



Applications

- Vibration Analysis and Monitoring
- Dynamic Balancing Equipment
- Engineering Test and Research
- Production & Quality Testing
- Compressors

Features

- Friction-free design for large dynamic range and long life
- Self-generated, high level, low impedance output simplifies your system

Description

The fluid-damped moving elements in CEC's 4-102 and 4-103 Vibration Transducers are free of friction, assuring long life and reliability. This frictionless design also features outstanding dynamic range. It can be used to measure displacement to 0.5 inches, with low-levels limited only by system noise.

These transducers are used to measure vibration in many applications, such as fans, high speed motors, rotating machinery, in test cells and on dynamic balancing equipment. The output signal is proportional to velocity, often considered the best measurement for machine health monitoring. The low impedance, high level output can drive AC meters and recorders without using special amplifiers, simplifying your system.

These transducers use a seismic mass magnet suspended by springs, and a coil fixed to the case. The output signal results from relative movement between the magnet and coil when the case vibrates. The system is fluid-damped, and operates above its natural frequency. The special "C" springs, which support the mass, withstand high transverse accelerations and rough handling. Positive hermetic sealing prevents damage to the instrument when used in severe environments.

Velocity Sensors



4-102/4-103 Vibration Transducer

4-102 Specifications

Sensitivity:	110 mV \pm 2 mV/in/sec at 100Hz 1 in/sec peak velocity at +77°F (+25°C)
Dynamic Range	
Frequency Range:	8 to 700 Hz
Amplitude:	0.5" peak-to-peak, maximum
Acceleration:	50 g's peak
Frequency Response:	\pm 5% of mean sensitivity, between 8 and 700 Hz at +77°F (+25°C)
Linearity:	\pm 5% at 100 Hz within the dynamic range
Transverse Response:	2% minimum
Temperature Range:	+32°F to +150°F (0°C to +66°C)
Thermal Coefficient of Sensitivity:	+0.06%/°F
Damped Resonant Frequency:	6 Hz nominal
Excitation:	Self-generating
Insulation Resistance:	50 megaohm minimum over temperature range at 45 VDC
Polarity:	Pin B to be positive with an upward velocity of the case
Shock:	100 g's peak maximum in the sensitive axis
Weight:	1lb maximum, including cable
Static Acceleration:	2.2 g's along sensitive axis produces full travel of moving mass
Electrical Connection:	18" cable with connector type MS3451W10SL-3P (CEC P/N 700775-00-0002)



Ordering Information

When ordering, specify Type 4-102-0001 or 4-103-0001. Mating connectors and cable assemblies are not furnished and must be ordered separately. In keeping with CEC's policy of continuing product improvement, specifications may be changed without notice.

4-103 Specifications

Note - Specifications match that of the model 4-102 except as follows:

Sensitivity:	110 mV \pm 2 mV/in/sec at 100 Hz, 1 in/sec peak velocity at +225°F (+107°C) into a 10,000 Ω resistive load
Frequency Response:	\pm 7% of mean sensitivity between 8 and 700 Hz at +225°F (+107°C)
Temperature Range:	+150°F to +250°F (+66°C to +121°C)
Thermal Coefficient of Sensitivity:	+0.05%/°F

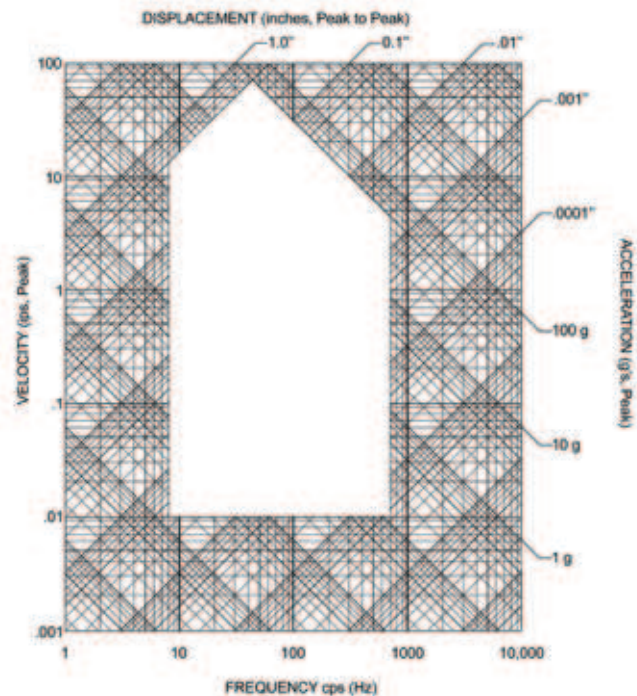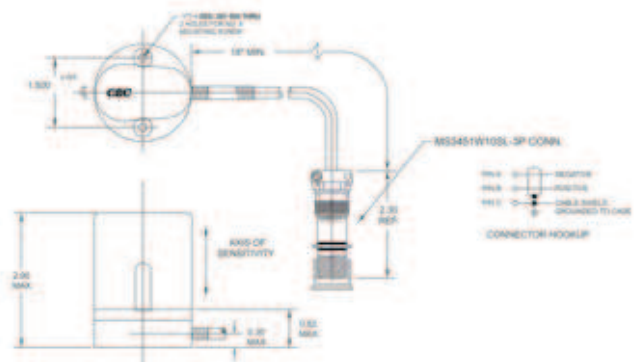

CEC Vibration Products • 746 Arrow Grand Circle • Covina, California 91722 • USA
(626) 938-0200 • (800) 468-1345 • Fax: (626) 938-0202 www.cecvp.com



www.instrumentation.it

Via Acquanera 29, 22100 COMO (Italy) tel. +39.031.525391 - fax +39.031.507984 - info@instrumentation.it

INSTRUMENTATION DEVICES SRL